

# SOMMER


## 315MHz Keypad conversion programming

Items included: 1x Wireless Keypad / 1x radio receiver



## Installing:

First install the radio receiver to the Control housing. Connect terminals 1-4 on the receiver to terminals 1-4 on the Control housing (in order).

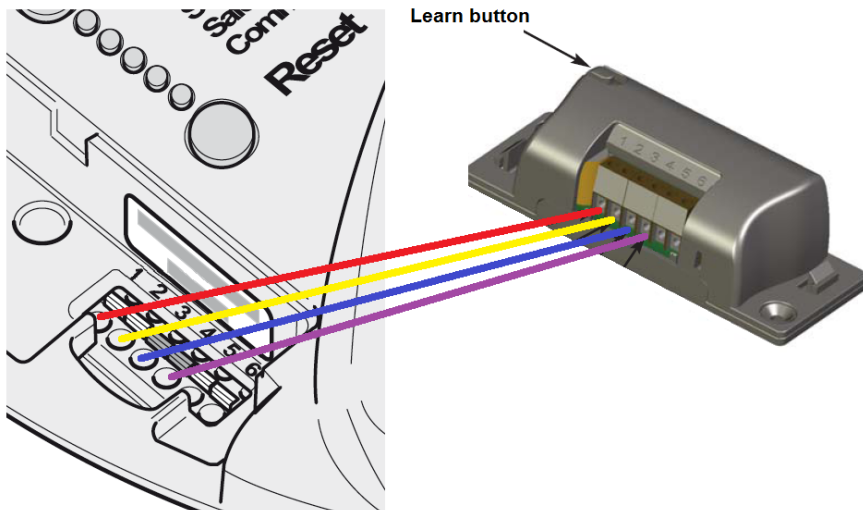

Press the Learn button on the receiver, if powered correctly, the receiver will “click” and a LED will light up inside.

## Programming Keypad:

1. Press and hold the # key until red and green LEDs light up (1 red and 3 green)
2. Press the Learn button on the radio receiver once (led will light up in radio receiver).
3. Immediately enter in the code “0000” and press \*button (red and green LEDs light up)
4. After all lights are off on the keypad, enter in the code “0000” (door will activate)

## Changing the access code:

1. Press \* button on the Keypad
2. Enter code “0000”
3. Press \* button
4. Enter desired access code (max. eight digits)
5. Press \* button (red and green LEDs light up)
6. After all LEDs are off, enter in new code (door will activate)